


JAXLIGHT™ SMART processor hookup

For "Phantom Ground" pre-amp input processors such as a Smart unit, the JAXLIGHT Line Amp grounding needs to be altered.

1. The "E" or ground terminal of the Line Amp must be connected to the processor "neutral" terminal through the black wire.
2. The L+ and R+ lines should be connected to the L and R inputs of the processor.
3. Under some conditions, it may necessary to also connect one side of the exciter supply to the projector frame to reduce hum or noise.

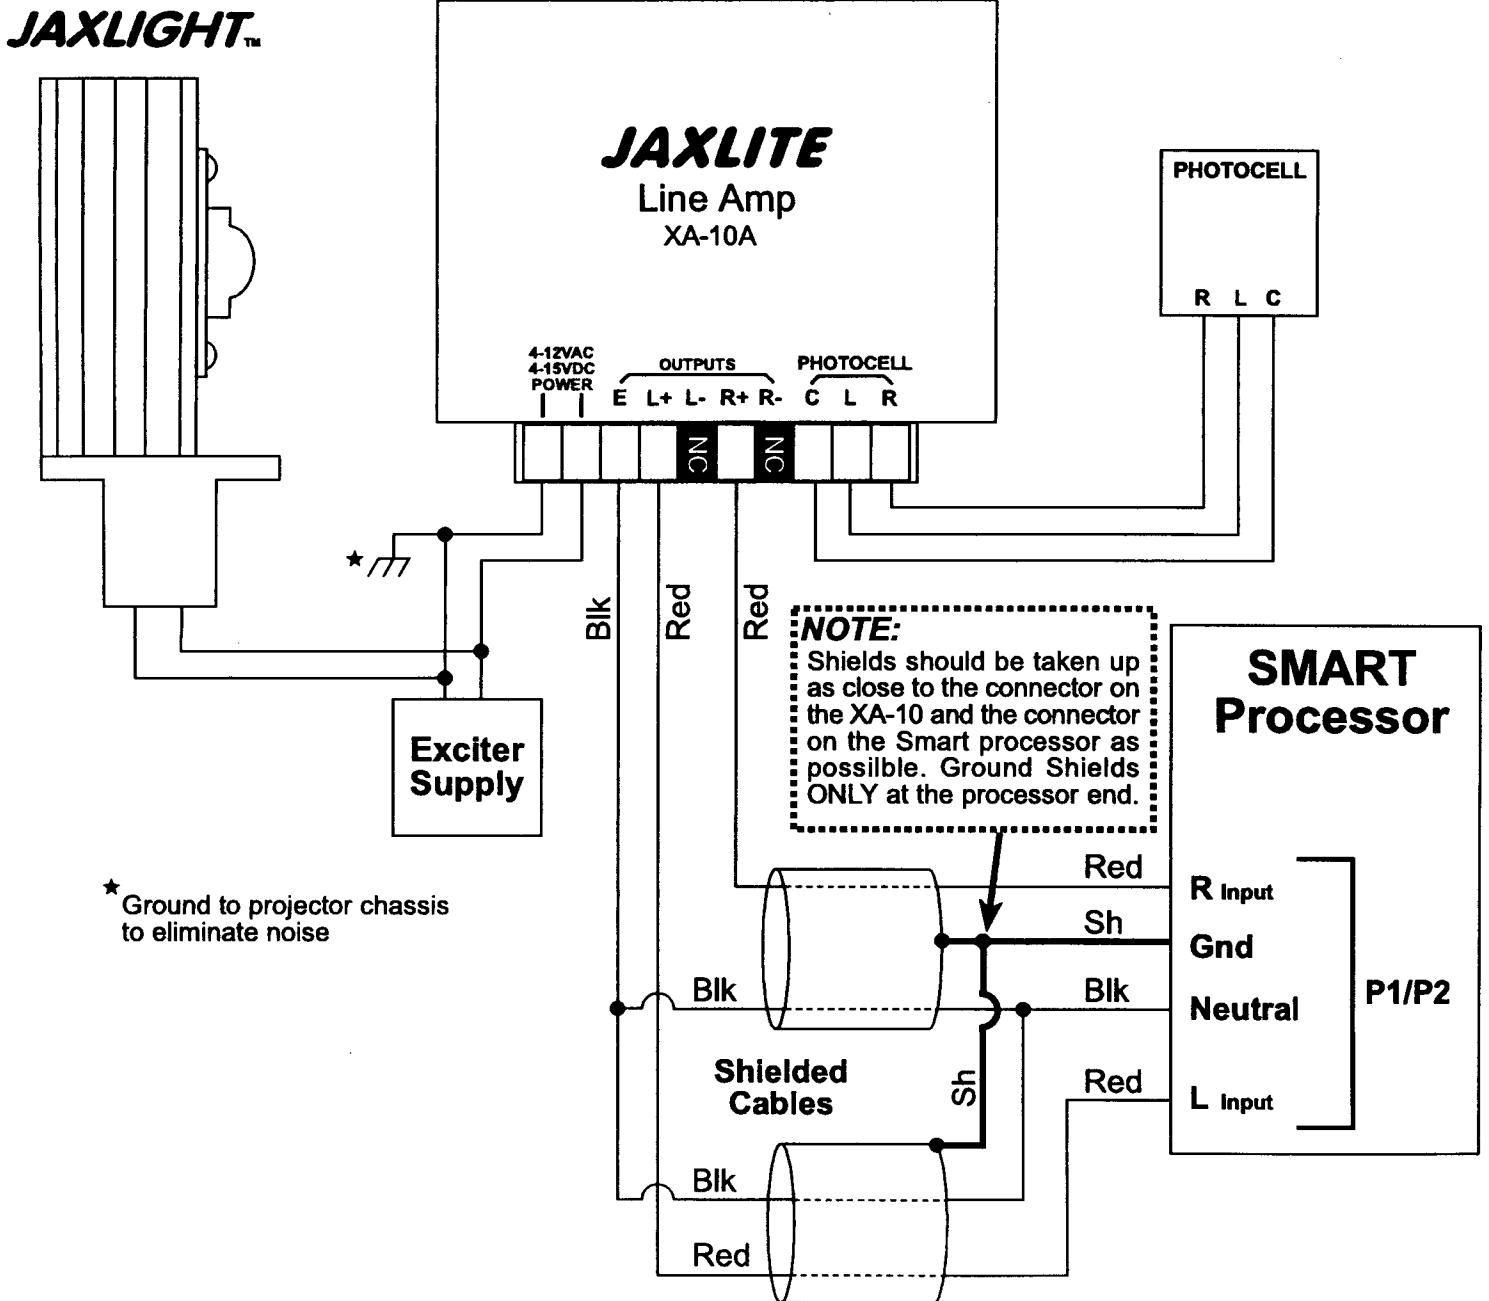

USL, Inc.
Quality Cinema Products

181 Bonetti Dr. San Luis Obispo CA 93401 USA
805-549-0161 fax: 805-549-0163 e-mail: usl@uslinc.com