


## Installing the Matrix Board in the MOD7a Stereo Processor.

Customers have reported serious shipping damage when freight companies are not careful in handling this product. The matrix card (daughter board) may jump out of the connectors on the main board and damage various small components. We are now shipping the matrix in a separate box to minimize damage.



- (1) Remove the 6 screws on the chassis top cover. Slide cover back and off the chassis. Orient the matrix board so that the LED's face the front ribbon connectors.
- (2) carefully position the pins on the bottom of the matrix board so they line up with the 4 connectors on the main board. Gently push the pins into all 4 connectors simultaneously.
- (3) Inspect your work. Even if only one pin is not properly seated in the connector the matrix will not work.
- ((4) See picture below. White arrows point to 2 connectors. 2 more on other side.

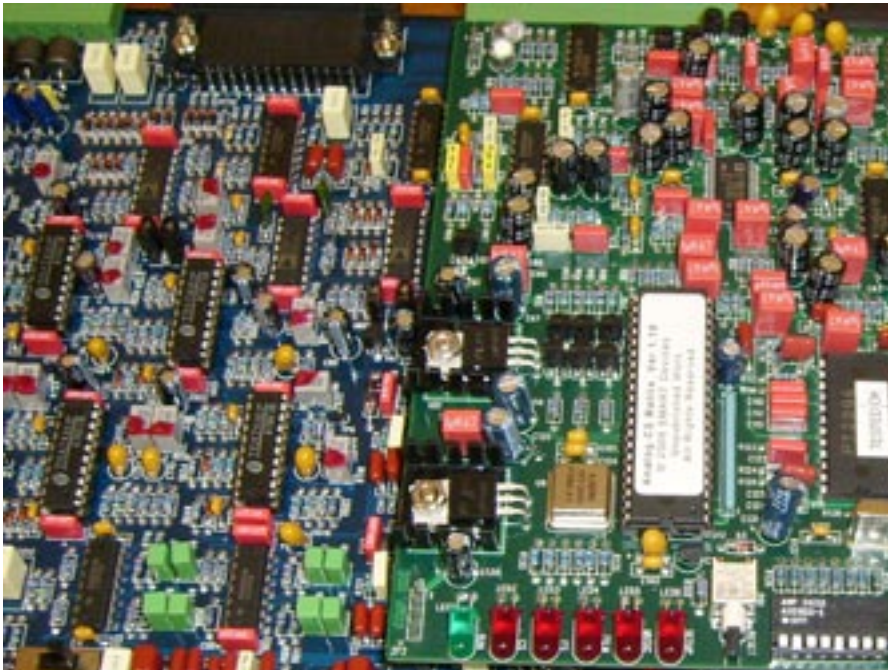